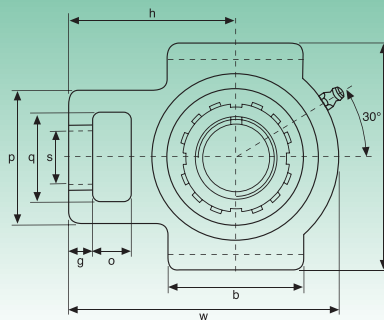



Tipo Type	Dimensioni - Dimensions																Coefficienti di carico (N) Load ratings (N)		Cuscinetto Bearing	Supporto Housing	Peso Weight	
	d	o	g	p	q	s	b	k	e	a	w	j	l	h	t	B ₁	Dinamico C Dynamic C	Statico C ₀ Static C ₀				
	mm/inch																				kg	
UKT205+H2305	20	16	10	51	32	19	51	12	76	89	97	32	24	62	48	35	13300	7457	UK205+H2305	T205	0,86	
UKT205+HE2305	¾	5/8	25/64	11/64	1¼	¾	21/64	15/32	263/64	3½	313/16	1¼	15/16	27/16	17/8	1,378						
UKT206+H2306	25	16	10	56	37	22	57	12	89	102	113	37	28	70	53	38	18525	10735	UK206+H2306	T206	1,26	
UKT206+HS2306	7/8	5/8	25/64	27/32	115/32	55/64	2¼	15/32	3½	41/64	429/64	129/64	13/32	2¾	23/32	1,496						
UKT206+HE2306	1																					
UKT207+H2307	30	16	13	64	37	22	64	12	89	102	129	37	30	78	59,5	43	24415	14630	UK207+H2307	T207	2,50	
UKT207+HS2307	11/8	5/8	33/64	233/64	115/32	55/64	233/64	15/32	3½	41/64	55/64	129/64	13/16	35/64	211/32	1,693						
UKT208+H2308	35	19	16	83	49	29	83	16	102	114	144	49	35	89	69	46	27645	16910	UK208+H2308	T208	2,50	
UKT208+HE2308	1¼	¾	5/8	317/64	115/16	19/64	317/64	5/8	41/64	431/64	543/64	115/16	13/8	3½	223/32	1,811						
UKT208+HS2308	13/8																					
UKT209+H2309	40	19	16	83	49	29	83	16	102	117	144	49	35	87	69	50	32395	20235	UK209+H2309	T209	2,51	
UKT209+HA2309	17/16																					
UKT209+HE2309	1½	¾	5/8	317/64	115/16	19/64	317/64	5/8	41/64	439/64	543/64	115/16	13/8	327/64	223/32	1,969						
UKT209+HS2309	15/8																					
UKT210+H2310	45	19	16	83	49	29	86	16	102	117	149	49	35	90	74,5	55	33345	22135	UK210+H2310	T210	2,60	
UKT210+HS2310	15/8																					
UKT210+HA2310	111/16	¾	5/8	317/64	115/16	19/64	325/64	5/8	41/64	439/64	555/64	115/16	13/8	335/64	215/16	2,165						
UKT210+HE2310	1¾																					
UKT211+H2311	50	25	19	102	64	35	95	22	130	146	171	64	41	106	76	59	41230	27930	UK211+H2311	T211	4,26	
UKT211+HS2311	17/8																					
UKT211+HA2311	115/16	63/64	¾	41/64	21/32	13/8	3¾	55/64	51/8	5¾	647/64	233/64	15/8	411/64	3	2,323						
UKT211+HE2311	2																					
UKT212+H2312	55	32	19	102	64	35	102	22	130	146	194	64	46	119	89	62	49780	34390	UK212+H2312	T212	5,02	
UKT212+HS2312	21/8	117/64	¾	41/64	21/32	13/8	41/64	55/64	51/8	5¾	741/64	233/64	113/16	411/16	3½	2,441						
UKT213+H2313	60	32	21	111	70	41	121	26	151	167	224	70	51	137	89	65	54340	38095	UK213+H2313	T213	6,56	
UKT213+HA2313	23/16																					
UKT213+HE2313	2¼	117/64	53/64	43/8	2¾	139/64	449/64	11/32	515/16	637/64	813/16	2¾	2	525/64	3½	2,559						
UKT213+HS2313	23/8																					
UKT215+H2315	65	32	21	111	70	41	121	26	151	167	232	70	48	140	-	73	64030	45885	UK215+H2315	T215	7,52	
UKT215+HA2315	27/16	117/64	53/64	43/8	2¾	139/64	449/64	11/32	515/16	637/64	99/64	2¾	157/64	533/64	-	2,874						
UKT215+HE2315	2½																					
UKT216+H2316	70	32	21	111	70	41	121	26	165	184	235	70	51	140	-	78	69065	50350	UK216+H2316	T216	8,56	
UKT216+HA2316	211/16	117/64	53/64	43/8	2¾	139/64	449/64	11/32	6½	7¼	9¼	2¾	2	533/64	-	3,071						
UKT216+HE2316	2¾																					
UKT217+H2317	75	38	29	124	73	48	157	30	173	198	260	73	54	162	-	82	79800	58805	UK217+H2317	T217	11,38	
UKT217+HA2317	215/16	1½	19/64	47/8	27/8	157/64	63/16	13/16	613/16	751/64	1015/64	27/8	21/8	63/8	-	3,228						
UKT217+HE2317	3																					

Bussole HA; HE; HS con filettatura in pollici
Inch dimension adapter sleeves HA; HE; HS